


Diagrams not to scale.
All dimensions in mm tolerance of +/- 2mm

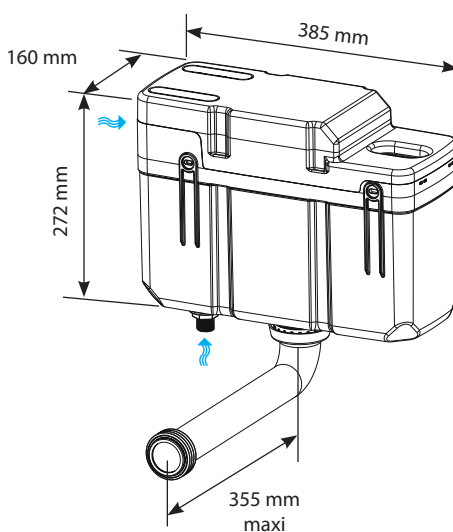

Specification:

- 6/4 litre dual flush
- Bottom & side entry inlet
- Left or right water connection
- 1/2" inlet connection
- WRAS approved Air Gap inlet valve
- WRAS approved flush valve
- PSE insulation available
- Front & top access for maintenance
- Height & depth adjustable flush pipe
- Suitable for comfort height WC's
- Reversible - with bottom & side entry

Unit Weight:

8.4kg