




Diagrams not to scale.  
All dimensions in mm tolerance of +/- 2mm

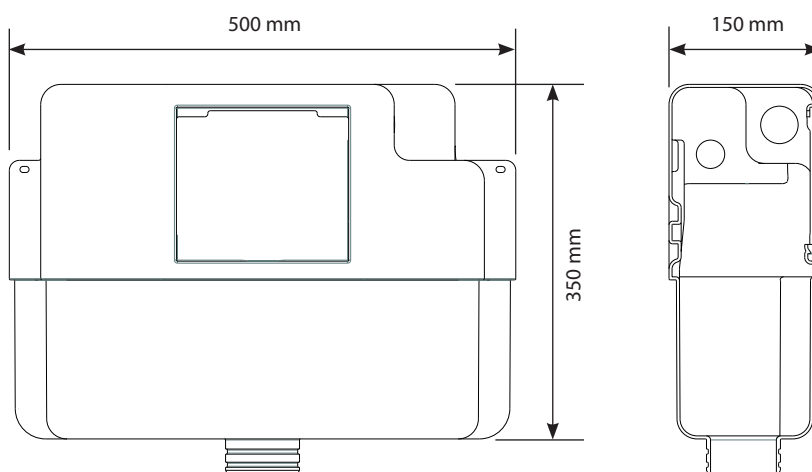

## Specification:

- 6/4 litre dual flush - adjustable to 4/2.6 litres
- Insulated against condensation
- Water inlet connection on the inside of the cistern with 1/2" brass isolating valve
- Flush plate access for maintenance
- Water saving
- Quiet fill with delayed action inlet valve
- Conforms to WRAS
- Conforms to EN 14055 Class 2 flushing standards
- Conforms to BREEAM requirements and UK Building Regulations

Unit Weight:

39g



bemodern® Product Data Sheet July 2025

Customer Service: 0191 428 3104  
Email: [bathroomorders@bemodern.co.uk](mailto:bathroomorders@bemodern.co.uk)  
[www.atlantabathrooms.com](http://www.atlantabathrooms.com)